


For Suction Acceleration Head Loss Prevention, & Low Pressure Flow Fluctuation

The Dual Use PipeGuard/LP range, by PULSEGUARD Inc.

For HIGHER PRESSURE PLEASE SEE PIPEGUARD / HP
 The Original 1965, one piece Gas Bag Damper, from the originators & with integral web stability
 Twin connection are off the shelf inventory items, if you do not wish to have in place flush before service nor constant temperature,
 and no pressure pulse interception, - then save the cost of an extra "T", and use the 2nd connection for RV, Drain, or Gauge.

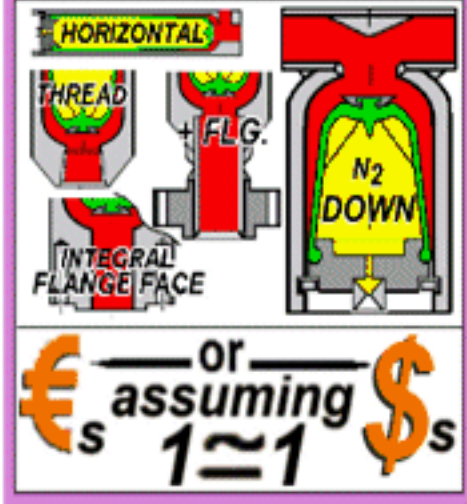

or assuming \$s 121 \$s

INVENTORY Nbrs. Below Used in Drawing Nbr. PRICE SPECIFICATION SERVICE

Please insert Material Preferred * into PART Number below when ORDERING	CONNECTIONS Max for This Volume To Pmp. To Sys.	Standard CMCTS. 45°x45° Type	Max Single Flange Size & Rating Available For This Damper But not "Off the Shelf"	Standard VOLUMES Liters	PRES. @ 93° C Std. PSI (N.B.)	\$s or € NC USA or Stockport UK IN 316L ss	LENGTH L Without Pipes Inch mm	DIAMETER D Inch mm	WEIGHT Kg.	SPARES KIT Pt. Nbr. "SK-...X...?" ? = "N" = Buna N (List), "E" = EPDM, "V" = Fluoro (Extra)							
											1/8" x 1/8"	1/4" x 1/4"	3/8" F x 1/4"	1/2" F x 3/8"	1/2" F x 3/8"	3/4" F x 1/2"	3/4" F x 1/2"
PiG-SS-1.0i-70	1/8" x 1/8"	NF	" + FIG. " Extra Charge	0.016/1,000p/	4.1	104	1.5	38	1.2	B24x50 ?							
PiG-SS-2.0i-70	1/4" x 1/4"	NF	Flanges & welding cost more & weigh more than Miniature Dampers	0.032/1,000p/	6.5	166	1.5	38	1.5	B24x80 ?							
PiG-SS-6.0i-70	3/8" F x 1/4"	NF		0.1 / 1,000p/	6	152	2.37	60	1.7	B44x75 ?							
PiG-SS-15i-70	1/2" F x 3/8"	NF		0.25 / 1,000p/	7.5	191	2.75	70	5.5	B57x98 ?							
PiG-SS-30i-70	1/2" F x 3/8"	NF	1.0"	0.5 / 1,000p/	10.5	266	2.75	70	6.0	B57x171 ?							
PiG-SS-30i-70	3/4" F x 1/2"	NF	1.25"	0.5 / 1,000p/	11.4	289	2.87	73	5.0	B62x175 ?							
PiG-SS-40i-70	3/4" F x 1/2"	NF	1.5" " FF "	0.66 / 1,000p/	12.5	318	2.87	73	7.0	B62x207 ?							
PiG-SS-60i-35	3/4" F x 3/4"	NF	Not Extra	1.0 / 500p/	14.5	368	3.46	89	17	B72x255 ?							
PiG-SS-60i-60	1.0" F x 1.0"	NF	1/2" 300#	1.0 / 870p/	11.0	279	4.49	114	25	B98x131 ?							
PiG-SS-75i-35	3/4" F x 3/4"	NF	1/2" 300#	1.25 / 500p/	17.5	445	3.46	89	22	B72x315 ?							
PiG-SS-100i-60	1.25M x 1.0"	NF	1.0' 600#	1.5 / 870p/	15.0	381	4.49	114	25	B98x232 ?							
PiG-SS-120i-60	1.5" M x 1.5" NM	NM	1.0' 600#	2.0 / 870p/	17.7	442	4.49	114	27	B98x300 ?							
PiG-SS-120i-35	2.0" M x 2.0" NM	NM	2.0" 300#	2.0 / 500p/	10.8	274	6.7	170	30	B139x105 ?							
PiG-SS-180i-50	1.5" M x 1.5" NM	NM	1.5" 600#	3.0 / 725p/	14.3	365	5.55	141	36	B123x267 ?							
PiG-SS-200i-50	1.5" M x 1.5" NM	NM	1.5" 600#	3.3 / 725p/	18.4	467	5.55	141	40	B123x295 ?							
PiG-SS-250i-50	2.0" M x 2.0" NM	NM	1.5" 600#	4.0 / 725p/	20.8	528	5.55	141	45	B123x357 ?							
PiG-SS-244i-35	3.0" M x 2.0" MW	MW	2.0" 300#	4.0 / 500p/	13.7	350	6.7	170	47	B139x212 ?							
PiG-SS-305i-35	3.0" M x 2.0" MW	MW	2.0" 300#	5.0 / 500p/	18	460	6.7	170	56	B139x325 ?							
PiG-SS-488i-35	3.0" M x 2.0" MW	MW	2.0" 300#	8.0 / 500p/	22	560	6.7	170	64	B139x420 ?							
THESE SIZES, ALSO AVAILABLE AT 1500 PSI / 100 Bar ARE NOT ALWAYS "OFF THE SHELF" INVENTORY																	
PiG-SS-693i-40	3" M x 3" MW.	MW.	4.0" 300#	11.4 / 600p/	24	610	8.6	219	96	B195x360 ?							
PiG-SS-1220i-40	3" M x 3" MW.	MW.	5.0" 300#	20 / 600p/	30	760	10.7	273	177	B230x500 ?							
PiG-SS-2135i-40	4" M x 4" MW.	MW.	6.0" 300#	35 / 600p/	36	915	12.7	324	290	B260x600 ?							
PiG-SS-3050i-40	5" M x 5" MW.	MW.	8.0" 300#	50 / 600p/	42	1067	14"	356	340	B300x700 ?							