




Part Number Series :-

This is a typical level 3 detail drawing, These are a minimum extra charge \$1,000




SoG/"O" Flg. "FLEXORBER/LP"

Dual Use: Pressure Pulse Interceptor + Flow fluctuation reducer
With LDi "FlexFlon" or DuPont TEFLON diaphragm. For lower pressures.
Optional 2 layer diaphragm with up to 4 times the life and half spares cost of virgin ptf. Secondary containment sealing, + Quick release from pipe base, gives least down time.

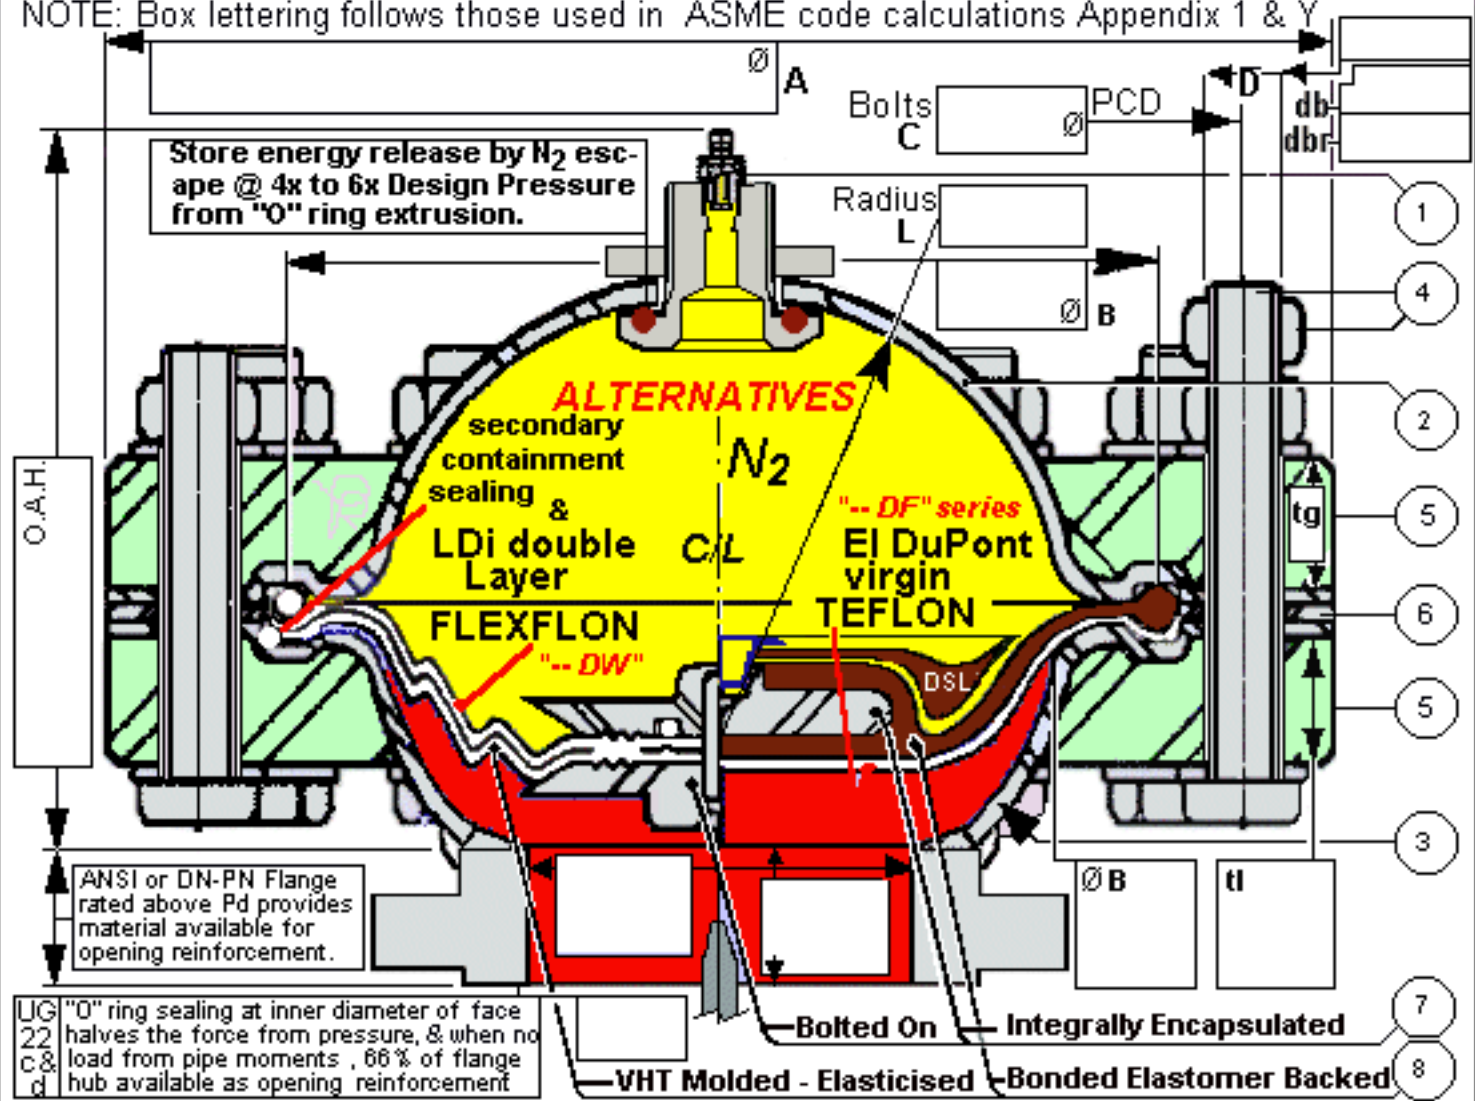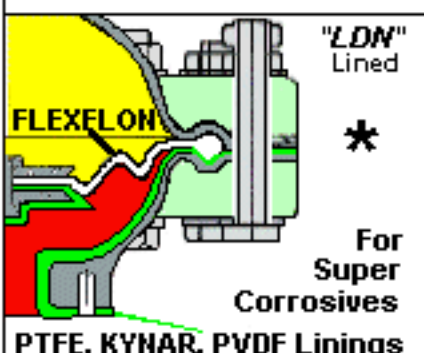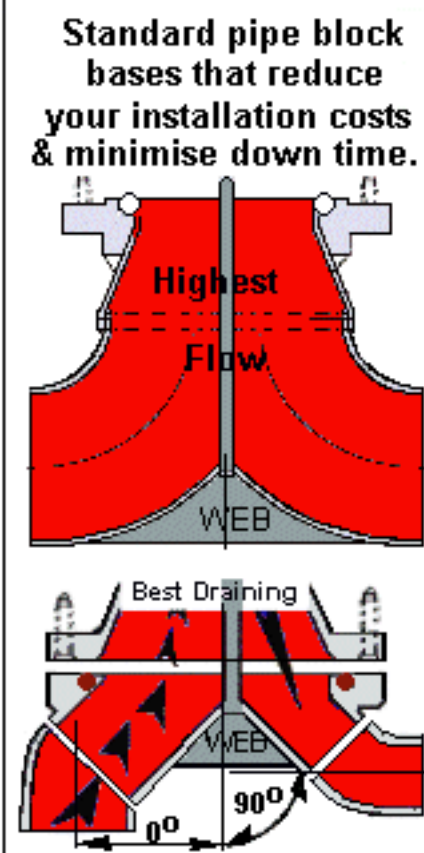

We will add fittings - it normally costs far less to shop jig build than to field fabricate.

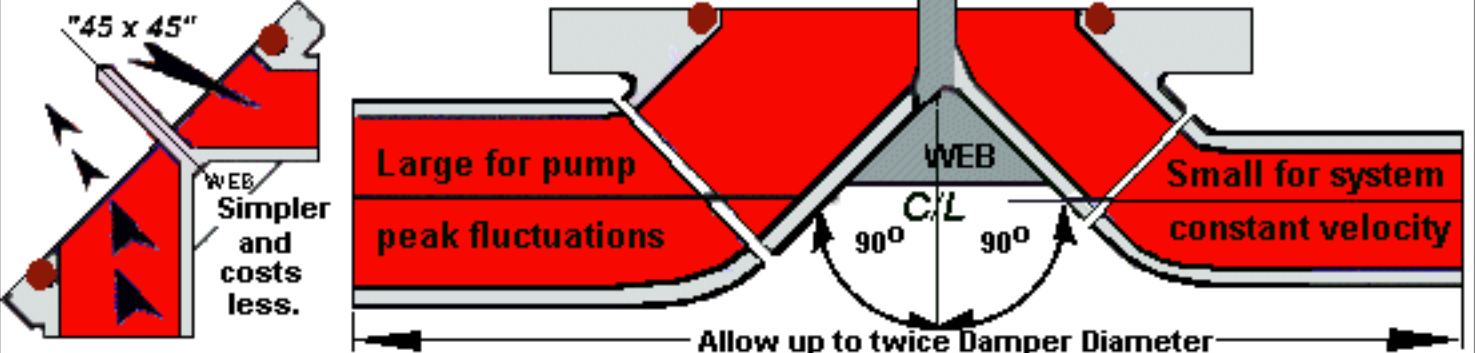

Drwg. Item	Part	Function Description	Material	I.D. #	CUSTOMER:
1	9019C	N2 Prefill			CUSTOMER REF.:
2	Flgd. Dished Hd	Head - N2 P/C			QUANTITY:
3	Flgd. Dished Hd	Liquid Chamber			W/O No.:
4		Bolts / & 3 Mtg.Nuts			WEIGHT (EST.):
5	Loose Flange	Support Rings			W:
6		Spacer Ring			ISSUED BY:
7		Anti-Extrusion Plate Assy.			CHECKED BY:
8		PTFE Diaphragm			(DAY/MONTH/YEAR)

PULSE GUARD Ltd. & Inc.
 Guard Against Pulsation Licensed M. Packer 1963
 ISO 9001 - 95-LON-AQ-459 Vessel Cert. 29289
 www.pulseguard.co.uk www.pulseguard.com
 PO Box 47 Stockport Box 506 Hampstead
 SK5 7BB Ches. UK NC 28443-9110 USA
 --44(0)161-442-6222 --01-910-270-2737
 Facsimile -443-1486 Fax. -01-910-270-2740
 In association with Strathairn Ltd & Liquid Dynamics International Ltd

TITLE: TEFLON (DuPont) LP PULSE DAMPER
For Mounting on Permanently installed FLOW THROUGH Piping Base Options
APPLICATION: * WORST CORROSIVE LIQUIDS
 Intercept Instrument destabilising high frequency;
 Prevent resonance; Stop acoustic waves; Address acceleration head forms of PULSATION; all with Flush-in-Place & Constant Temperature Features.

FILE REF: SOww4Y&1.gif	ALL DIMENSIONS ARE IN MM EXCEPT AS STATED.
SCALE: NTS	VIEW NO. "u" SoG-"O/"
SHEET: 1 OF 1	REV. 0